

Crawford
620 Teledock


Crawford 620 Teledock

The Crawford 620 teledock is the optimal efficiency solution in industrial and logistics applications


The Crawford 620 teledock is a hydraulic dock leveler, designed to offer the highest loading and unloading efficiency in general industrial and logistics applications.

Its main advantage is its telescopic lip, which allows truck bed utilization to be optimized. To enable vehicles with different widths to be handled, the telescopic lip is available in various configurations. After loading or unloading, the lip is parked under the leveler platform. The Crawford 620 teledock fully complies with the requirements of the European Standard EN 1398 and includes the following safety features:

- free floating position – adapts to vertical movements
- platform torsion +/- 100 mm – adapts to twisted truck beds
- 2 hydraulic cylinders for emergency stops
- platform tear-plate with anti-slip properties
- protecting side plates – toe guards

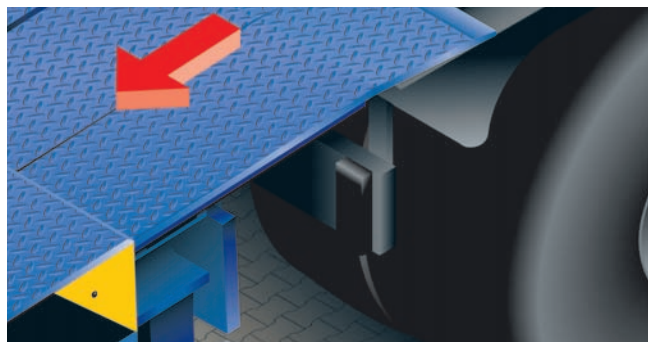

Different lip options.

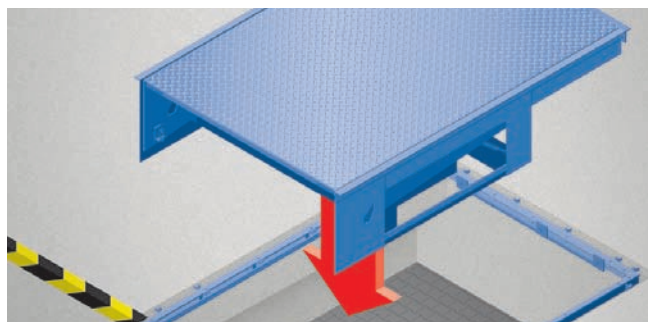

Different frame solutions for installation.

Control Units

Standard: Service and fault indicator, easy, push-button function for lifting platform/lip out.

Impulse button for reverse to parking position.

Easy to install

The Crawford 620 teledock is easy to install. A number of frame alternatives facilitate installation in new or existing loading bays.



Loading bay with the Crawford 620 teledock.

Service - The key to better business

Through our extensive service and maintenance program we help ensure an optimized lifetime of your product.

Technical facts

Nominal lengths, mm:

2000, 2500, 3000, 3500, 4000, 4500, 5000

Nominal widths, mm:

1750, 2000, 2200, 2400 – for all lengths

Load capacity:

6 tonnes (60kN) – all sizes above.
Optional capacity 8 and 10 tonnes

Power:

230/400V 3-phase 1.5 Kw

Vertical working range:

depends on total leveler length – see Technical Brochure

Platform tear-plate thickness:

8/10 mm and with platform reinforcements, based on the load capacity

Coating:

Standard: RAL 5010 Enthian Blue.
Options: any RAL color or galvanized steel

Lip material:

Standard: steel. Option: aluminum

Lip configuration:

Standard: square. Options: tapered or retracting tongues

Lip length:

Standard: 500 mm. Option: 1000 mm