

**DOCKING SYSTEMS**

Crawford  
**613 Minidock**



Easy to operate  
 Economical alternative  
 Ergonomic flat design

### Easy to operate

The Crawford 613 minidock is developed to be an easy to operate and economical solution in environments where standardized vehicles with the same bed height is used. The Crawford 613 minidock is equipped with a gas spring, making it easy for one person to operate – just lift and swing the platform. The Crawford 613 minidock also meets the demands of most loading operations and fulfills all ergonomic requirements.

### Adapts to vertical movements

The Crawford 613 mindock design includes a limited, free-floating function, allowing the platform to adapt to the vertical movements of a vehicle bed during loading and unloading.

### Ergonomic and economic advantages

The lip of the Minidock is made of steel. The shape of the lip is extremely flat and the design of the rear connection to the dock edge is bump-free, resulting in a smooth passage between building and truck bed. The Crawford 613 minidock can be complemented with a dock shelter to get the advantages of a complete docking system. Such solution improves the loading/unloading process and hence the working environment.




*Ramp model - smooth loading.*




*Flat design for ergonomic solution.*

### Easy installation

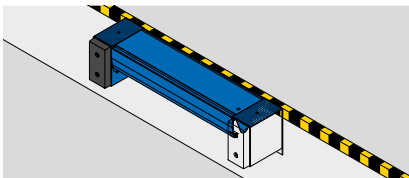

*Ramp model. Load capacity 4 tonnes (40kN) and 6 tonnes (60kN).*

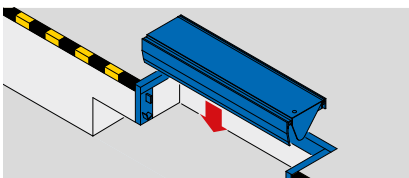

*Pit model. Load capacity 4 tonnes (40kN) and 6 tonnes (60kN).*

### Technical Data

Handling rod for manual operation supported by a gas spring device	
Nominal length	700 mm
Nominal width	1250, 2000, 2200 mm
Load capacity	4 tonnes, 6 tonnes
Vertical working range	
Rise above dock	100 mm
Fall below dock	100 mm
Platform tear-plate thickness with platform reinforcements according to the load capacity	4/6 mm
Coating	RAL 5010, hot dip galvanized
Lip material	Steel
Installation model	Ramp, pit
Rubber buffers	RB 250x250x90 RB 500x250x90
European standard	EN 1398 dock levellers